
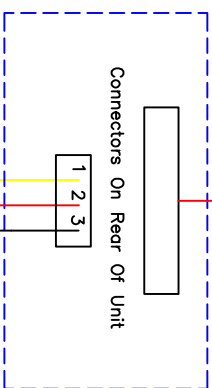

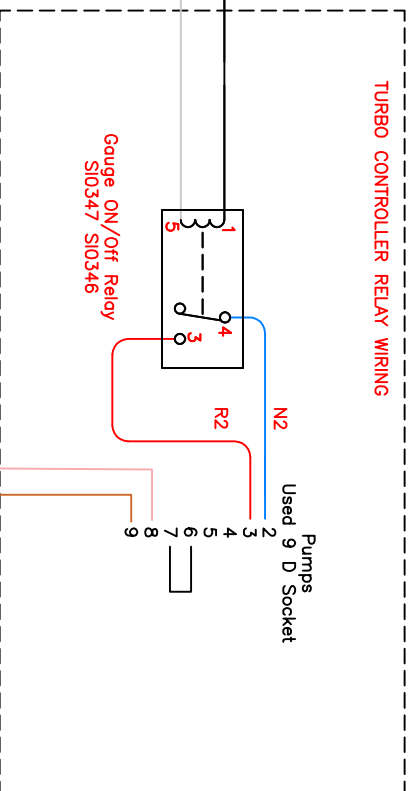
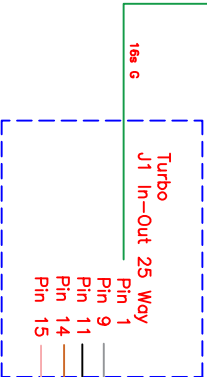




SYSTEM CABLES

HEAD AMP	70101/15
SOURCE	70101/12
FLOW	70101/20
RIBBON	70101/21
GAUGE	SI0895
MAINS	SI1024
USB	SI1259

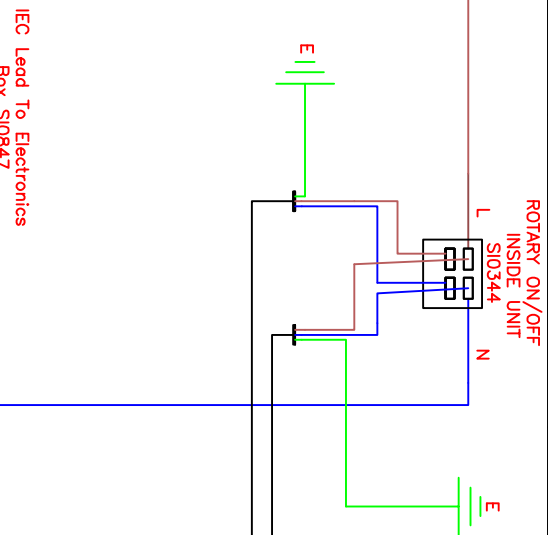

15 D Socket SI0570
With 4 Way Conn SI1716




37 D TYPE SOCKET
ON REAR PANEL
PIN 1 TO PIN 1
SI1482 SI1794 SI1795

To F-P Sensors
Use 25 D Socket

Flow1

12	13	10
----	----	----

FOR 220-240 VOLTS SET
SWITCH ON SI0508 AS ABOVE

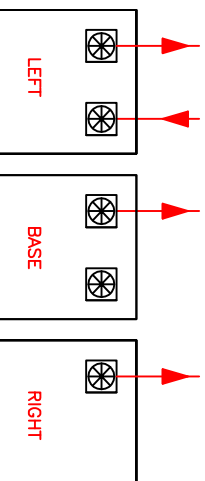



AIR FLOW VIEWD FROM BACK OF UNIT

7 FANS IN TOTAL
24v 80mm SI0793



220-240 VOLTS AC
0.7kVA 50/60 Hz

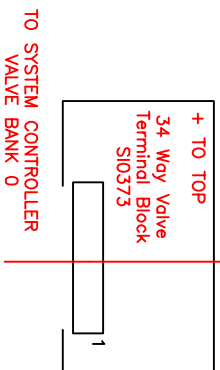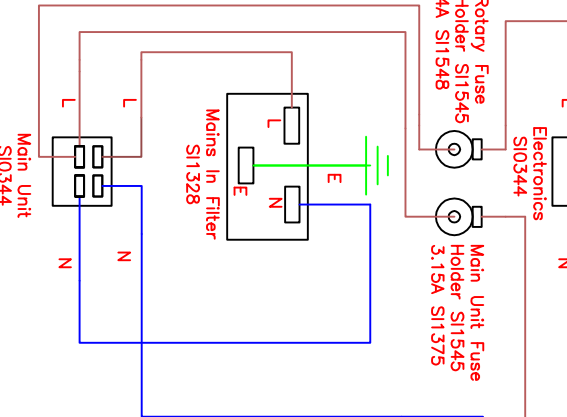

	JH	AGILENT CONTROLLER WIRING AMENDED		26-07-2022	C
REV.	ISSUED BY	DESCRIPTION		DATE	REV. No.
REMOVE ALL BURRS & SHARP EDGES DO NOT SCALE					
MATL.	ALL DIMENSIONS IN MILLIMETERS		 THIRD ANGLE		
FINISH	TOLERANCES UNLESS OTHERWISE STATED		DRG. SIZE A1		
	±0.15° ANGULAR		SCALE		
	SURFACE FINISH 1.6μ		NTS		
TITLE		ABCA2 AGILENT 220-240 VOLTS		DRG No 20602A-004-001	
SERCON LTD					

©